

Professional Sand Blast Kit

Part No.	Size	Product Details (Inlet x Outlet)	Max PSI	Max GPM	Max F°	Each
16.0204	--	Professional Sandblast Kit Without Nozzle			195°	\$199.00
16.0206	1.00 mm	2.0 Orifice			195°	\$205.50
16.0207	1.20 mm	3.0 Orifice			195°	\$205.50
16.0208	1.30 mm	3.5 Orifice			195°	\$205.50
16.0209	1.40 mm	4.0 Orifice			195°	\$205.50
16.0210	1.50 mm	4.5 Orifice			195°	\$205.50
16.0211	1.60 mm	5.0 Orifice			195°	\$205.50
16.0212	1.70 mm	6.0 Orifice			195°	\$205.50
17.0875	Replacement	1.00 mm - 2.0 Orifice w/ O-Ring				\$6.65
17.0876	Replacement	1.20 mm - 3.0 Orifice w/ O-Ring				\$6.65
17.0877	Replacement	1.30 mm - 3.5 Orifice w/ O-Ring				\$6.65
17.0878	Replacement	1.40 mm - 4.0 Orifice w/ O-Ring				\$6.65
17.0879	Replacement	1.50 mm - 4.5 Orifice w/ O-Ring				\$6.65
17.0880	Replacement	1.60 mm - 5.0 Orifice w/ O-Ring				\$6.65
17.0881	Replacement	1.70 mm - 6.0 Orifice w/ O-Ring				\$6.65
41.0357	Replacement	Brass Nozzle Holder w/ Tungsten Nozzle				\$57.25
41.0358	Replacement	Ø13, 1x2, 62 O-Rings				\$1.30
41.0360	Replacement	1/4" BSP Blocking Nozzle Plug				\$1.55
41.0363	Replacement	20" Sand Probe				\$12.80



Industrial Sand Blast Kit

Part No.	Size	Product Details (Inlet x Outlet)	Max PSI	Max GPM	Max F°	Each
16.0117	Nozzle Not Included	1/4" Plug (Inlet) - 25 ft. Hose	3,000-5,000	4-8	195°	\$280.00
A 1/4" 0° Threaded Nozzle (Not Included) Is Required For The Industrial Sand Blast Kit To Function Properly. See Nozzle Selection Chart On Page 12 To Properly Select The Correct 1/4" 0° Threaded Nozzle						
16.0118	Replacement	Sand Blast Head	--	--	--	\$66.25
16.0119	Replacement	1/8" M Sand Valve	--	--	--	\$7.20
16.0121	Replacement	Tungsten Carbide Nozzle	--	--	--	\$102.50
16.0123	Replacement	Gasket	--	--	--	\$2.85
16.0124	Replacement	Sand Probe	--	--	--	\$52.50
16.0127	Replacement	3/4" x 3.5 mm x25' Nylonbraided Hose	--	--	--	\$53.75
16.0128	Replacement	1/4" QC x 1/4" F Nozzle Holder	--	--	--	\$8.20




Assembly Instructions

Pre-Installed Items

- Item #4 & #5 are already pre-installed into item #1
- Item #2 is already pre-installed into item #1

Install The Following Items

- Install the appropriate sized 1/4" 0° threaded spray nozzle (**NOT INCLUDED**) into item #10 (SEE RIGHT DIAGRAM)
- Securely install item #10 in rear of item #1, lock item #10 in place using item #3
- Install item #7 in top port of item #1
- Connect item #6 & #7 to each end of item #9
- Secure item #9 in place with the clamps provided (#8)

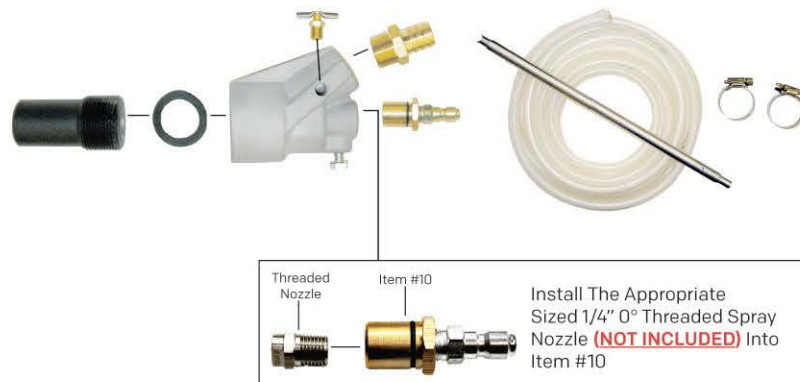

Install The Appropriate Sized 1/4" 0° Threaded Spray Nozzle (**NOT INCLUDED**) Into Item #10